



## AVW HIGH-CUBE ALUMINUM VAN



### HEAVY DUTY FRONT COUPLER

Stoughton's 3-1/2" deep upper coupler, the heart of every standard Stoughton trailer, meets AAR certification and utilizes an SAE cross-head design to resist abuse better, limiting downtime. Where many competitors use a 3/16" steel bottom plate, Stoughton trailers have a 1/4" thick bottom plate. The front coupler contains a heavy-duty steel front lip and wrap-around apron, which absorbs hits and scrapes better than most competitive aluminum versions. In addition, we stretch our roof sheet across both the length and the width of the trailer, creating a powerful built-in tension.




### ROBUST REAR UNDERRIDE GUARD

The new rear underride guard comes standard with no additional cost and weight. It resists compartmental intrusion of an automobile when the location of impact is at 30% to 100% overlap of the width of the car to the guard. It complies with all applicable U.S. and Canadian regulations. The bolt-on design allows for easy repairability.

### BECAUSE EVERY MILE COUNTS


Our Stoughton AVW High-Cube Van Trailer, commonly known as sheet and post design, will allow you to haul more freight for more miles at the lowest cost per mile. And, every Stoughton AV trailer is built to the highest quality standards in the industry, providing years of trouble-free operation with minimal maintenance.

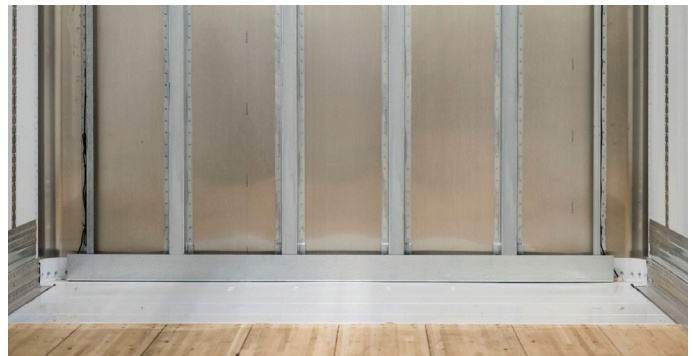

### HIGH IMPACT FRONT END

Our trailers come standard with six 16-gauge steel nose posts unlike competitive trailers that are equipped with only four posts. A 6" steel angle across the bottom ties all six posts together to absorb impact better. Top front damage is reduced and easier to repair due to the durable 3-piece top front section. The cast aluminum corner caps overlap the aluminum nose sheets and the top rail for easier change out.



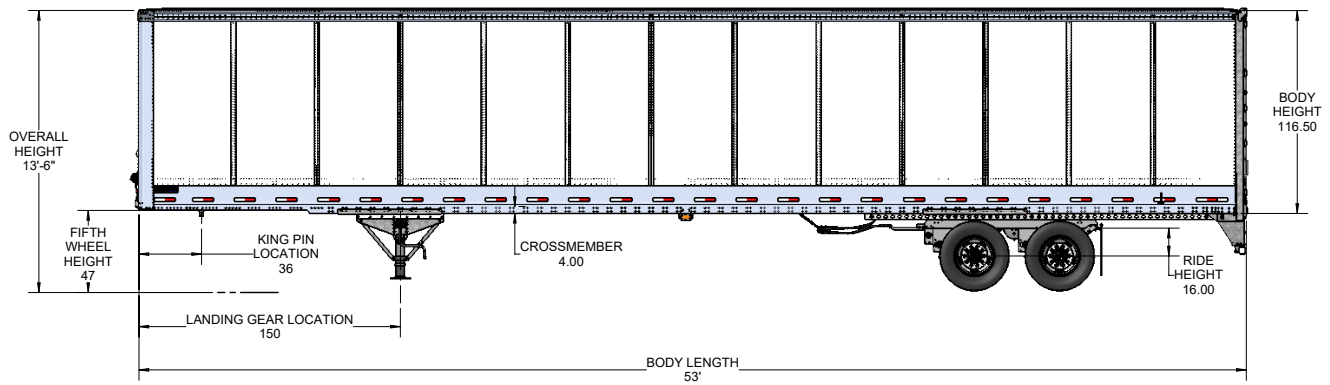

## SPECIFICATIONS\* – AVW HIGH-CUBE ALUMINUM VAN

### ASSEMBLY NUMBER DESCRIPTIONS

- Base Model** – AVW-535T-S-C-AR (Aluminum Van, Hi-Cube, 53-ft., 13'-6" height, tandem, slider, air-ride)
- Length** – Refer to drawing
- Width** – Refer to drawing
- Height** – Refer to drawing
- Capacity** – 20,000-lb. beam rating per axle – 27.5-ton payload
- Hot-Dip Galvanized Protection** – The steel frame components, slider box and the rear underride guard are hot-dip galvanized for superior protection against corrosion and significantly extending component life.
- Suspension** – Trailing arm style air suspension with an external dock lock to minimize dock walk
- Axle** – 6" tapered spindles, bearings - with Pro-Torq axle nuts
- Brakes** – Extended service, quick change, 16-1/2" x 7", non-asbestos, meets requirements of Federal Motor Vehicle Safety Standard No. 121 and filtered air couplers
- Hubs** – 10 stud hub piloted with cast iron drums, 11-1/4" bolt circle
- Oil Seals** – 6-year guaranteed performance system with grease
- Wheels** – 5-hand hole, steel, powder coated
- Tires** – As requested
- Landing Gear** – Two-speed vertical, square legs with 10" cushion foot, crank on roadside
- Suspension Subframe** – 4-pin slider-type with hot rolled 80,000 min. yield wide-slide rails for 62" AFT location to 150" FWD location
- Landing Gear Subframe** – Wide inside-type mounting, longitudinal mounting channels spanning five cross members with cross, fore and aft diagonal bracing and cross channel braced
- Upper Coupler** – SAE kingpin, cross-head type, AAR rated built into structure, 3-1/2" shallow hi-tensile sandwich unitized with full width upper and lower plated and internal reinforcements
- Cross Member** – 80,000 min. yield. Shallow area ahead of landing gear uses (3) hat-shaped heavy-duty members. Landing gear, center bay area and area over slider rails use 4" I-Beam, 12" on center
- Lower Rail** - Extruded aluminum, 6061-T6
- Floor** – 1-3/8" nominal laminated oak from rear sill forward, butted to kingpin subframe (smooth steel 52" for forward area), fastened with 3 x 2 x 3 pattern of staggered screws per board/per cross member. Rear threshold plate with forward edge beveled into floor
- Front Wall** – Prepainted .050" aluminum beveled corners, prepainted .050" aluminum front panels, (6) 16 GA. Steel hat-shaped x 2-1/2" deep, equally spaced with heavy-duty lower sill across front and bevel corners
- Side Walls** – Galvanized steel posts, 24" on center (16" on center landing gear forward) hat-shaped, 1-3/8" deep x 5" side with double rivet row 2" and 4" alternate centers vertically through .050" aluminum prepainted panels
- Upper Rail** – Extruded aluminum, 6061-T6
- Roof** – .040" one-piece aluminum sheet pre-tensioned against galvanized steel bows 24" on center, crowned and fastened to top rails with galvanized bolts, stainless steel washers and lock nuts
- Rear Frame** – 2" x 4" x 3/16" tubular steel corner posts welded rigid to 1-1/4" heavy-duty shallow header and 11-3/8" lower sill and threshold member
- Rear Doors** – 1/2" composite door, dual durometer PVC gaskets, four 2-3/4" wide extruded aluminum hinges and one lock bar per door, loop style door hold backs
- Lining** – Exterior grade plywood or dymond ply. 1/4" x 96" high. Installed horizontally
- Electrical** – 12-volt system, 7-way socket with stop/tail, direction, license, applicable marker, clearance and conspicuity per DOT/Federal Motor Vehicle Safety Standard No. 108. Combination center marker and turn signal. Return ground on all lights. LED lights throughout with harnesses for lifetime solution
- Bumper** – Corner bars, cross-channel and light guards welded rigid to rear sill. Bolt on rear impact guard with bolt on anti-skid horizontal member with 4 vertical posts for added safety. Meets DOT Requirements. Two dock bumpers on rear
- Mud Flaps** – 24" wide anti-sail

\*Current specifications are subject to change at anytime. Please contact Stoughton Sales for additional information.

DISTRIBUTED BY:



Stoughton Trailers LLC  
416 S. Academy Street, Stoughton, Wisconsin 53589  
608/873-2500 Fax: 608/873-2575  
StoughtonTrailers.com