

STOUGHTON[®]

Z-PLATE[®] VAN



KEEPS YOUR FLEET ON THE ROAD

Stoughton's Z-Plate van features include solid, full width oak floors, an extra wide extruded aluminum scuff rails and the unique recessed splice plate with "A" slots for better cargo control using any standard cargo restraint system.



PATENTED POLY-LAMINATE PANELS

Stoughton's revolutionary Z-Plate vans are built from composite laminate panels. These unique, patented poly-laminate panels are manufactured using epoxy coated inner and outer galvanized steel skin for superior durability even in the most demanding applications. If repairs are required, Stoughton's Z-Plate panel design allows easy panel replacement without requiring the removal of adjoining panels common with other plate trailer designs. This means less time in the shop and more time on the road.


STANDARD REAR UNDERRIDE GUARD

The new rear underride guard comes standard with no additional cost and weight. It resists compartmental intrusion of an automobile when the location of impact is at 30% to 100% overlap of the width of the car to the guard. It complies with all applicable U.S. and Canadian regulations. The bolt-on design allows for easy reparability.

ALUMINUM SCUFF & SCUFF LINER

Our new Z-Plate Lower Rail design is 3-½" taller, allowing rivets to be placed 3-½" higher. By moving the rivets away from the scrape zone, we have improved durability. Our new Aluminum Side Rail & Scuff combination has been increased to a full 12" height. The scuff prevents damage to the trailer interior from forklift and cargo damage while loading and unloading. This allows conspicuity tape to lay flat on the lower rail.



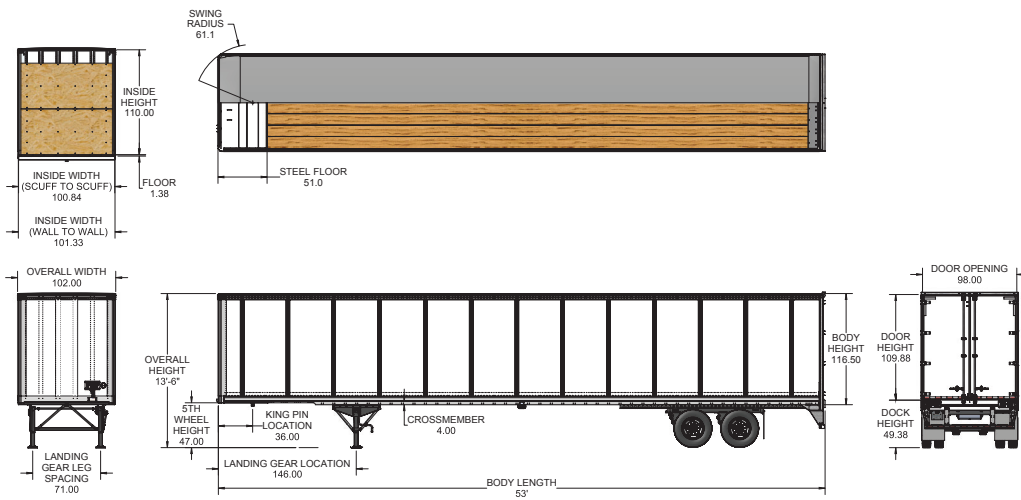

SPECIFICATIONS* – Z-PLATE® VAN

ASSEMBLY NUMBER DESCRIPTIONS

1. **Base Model** – ZGPVW-535T-S-C-AR (Z-Plate Van, G-Bond Plate, Extra Wide, Hi-Cube, 53 ft, No. 5 height, tandem, slider, air-ride)
2. **Length** – Refer to drawing
3. **Width** – Refer to drawing
4. **Height** – Refer to drawing
5. **Capacity** – 25,000-lb. beam rating per axle – 27.5-ton payload
6. **Suspension** – Trailing arm style air suspension with an external dock lock to minimize dock walk
7. **Axle** – Tapered spindles, bearings with Pro-Torg axle nuts
8. **Brakes** – Extended service, quick change, 16-½" x 7", non-asbestos, meets requirements of Federal Motor Vehicle Safety Standard No. 121 and filtered air couplers
9. **Hubs** – 10 stud hub piloted with cast iron drums, 11-¼" bolt circle.
10. **Oil Seals** – 6-year guaranteed system with grease
11. **Wheels** – 5 hand hole, steel, powder coated
12. **Tires** – As requested
13. **Landing Gear** - Two speed vertical, square tubular legs with 10" x 10" removable cushion foot, crank on roadside
14. **Suspension Subframe** – 4-pin slider-type with hot rolled 80,000 min. yield wide-slide rails for 62" AFT location to 150" FWD location
15. **Landing Gear Subframe** – Wide inside-type mounting, longitudinal mounting channels spanning five cross members with cross, fore and aft diagonal bracing and cross channel braced
16. **Coupler** – AAR Certified Coupler, 3-½" shallow hi-tensile sandwich unitized with full width upper and lower plated and internal reinforcements. S.A.E. kingpin, cross-head type
17. **Cross Member** – 80,000 min. yield. Shallow area ahead of landing gear uses (3) hat-shaped heavy duty members. Landing gear, center bay area and area over slider rails use 4" I-Beam, 12" on center
18. **Lower Rail** - Extruded aluminum, 6061-T6
19. **Floor** – 1-¾" nominal laminated oak from rear sill forward, butted to kingpin subframe (smooth steel 52" for forward area), fastened with 3 x 2 x 3 staggered screws per board/per cross member. Rear threshold plate with forward edge beveled into floor
20. **Front Wall** – .125" natural aluminum beveled corners, prepainted .050" aluminum front panels, (6) 16 GA. 2-½" deep galvanized steel posts with heavy-duty lower sill across front and around corners
21. **Side Walls** – Prepainted white composite side panels with prepainted white outer splice plates riveted with ¼" dia. aluminum rivets on 1 ½" centers to panel and 14 Ga. galvanized steel inner splice plate with 6" on center vertical "A" slots
22. **Upper Rail** – Extruded aluminum, 6061-T6
23. **Roof** – 18 Ga. galvanized bows, 24"/16"/24" on center, hat shape, 1-½" deep with ¾" crown, .040" one piece aluminum sheet-edge hemmed over upper rail and riveted to outside
24. **Rear Frame** – 2" x 4" x ¾" tubular steel corner posts welded rigid to 1-¼" heavy duty shallow header and 11-¾" lower sill and thresh old member
25. **Rear Doors** – ½" composite door, dual durometer PVC gaskets, four 2-¾" wide extruded aluminum hinges and one lock bar per door, loop style door hold backs
26. **Lining** – Exterior grade plywood or dymond ply. ¼" x 96" high. Installed horizontally
27. **Electrical** – 12-volt system, 7-way socket with stop/tail, direction, license, applicable marker, clearance and conspicuity per DOT/Federal Motor Vehicle Safety Standard No. 108. Combination center marker and turn signal. Return ground on all lights. LED lights throughout with harnesses for lifetime solution
28. **Bumper** – Corner bars, cross-channel and light guards welded rigid to rear sill. Bolt on rear impact guard with bolt on anti-skid horizontal member with 4 vertical posts for added safety. Meets DOT Requirements. Two dock bumpers on rear
29. **Mud Flaps** – 24" wide anti-sail
30. **Painting** – Understructure undercoated prepainted white front panels, side panels and doors. Steel body parts grit-blasted, primed with two-part epoxy primer and finished with two-part modified acrylic enamel. Optional hot-dip galvanized finish available

*Current specifications are subject to change at anytime. Please contact Stoughton Sales for additional information.



STO ZG-01/02-20